

EMERGENCY LIGHT

DUAL HEAD SERIES

LED




TECHNICAL DATA

Input voltage	120 - 277 V~ (Multivoltage)
Input frequency	50 / 60 Hz
Dimmable	0 - 10 V
Color temperature	6000K
Operating temperature	0 to 40°C
Harmonic distortion	<20%
Power factor	0.8
Opening angle	120°
Battery	Nickel-Cadmium, maintenance-free 3.6 V, 600 mAh
Charging time	24 hours
Working time	90 minutes
Mounting	Superimposed (included)
Ranking	IP20
Body	ABS (Acrylonitrile butadiene butadiene styrene)
Optics	Polycarbonate
Color	White



PHOTOMETRIC DISTRIBUTION



PHOTOMETRY

To download the IES file go to:
Jungo.Lighting/resources

JUNGO

LIGHTING

Locate evacuation exits during power outages with emergency lighting for **up to 90 minutes**. This LED luminaire features with two steerable heads, a Nickel-Cadmium battery rechargeable in only 24 hours. Self-diagnostic button and LED indicator to confirm battery charge status.

CERTIFICATES




NOM-003-SCFI-2014



Model	Power rating	Luminous efficiency	Luminous flux
EML-B	6 W	33 lm/W	200 lumens


KEY FEATURES

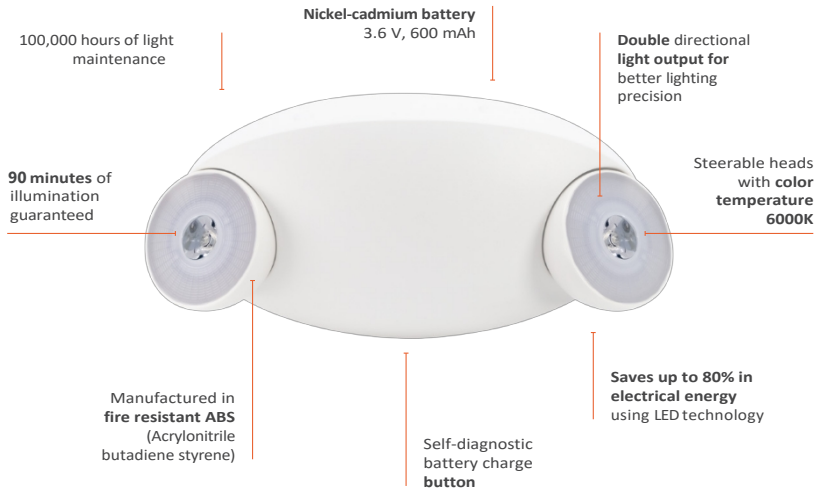

DIMENSIONS

EML-B

0.3 kg

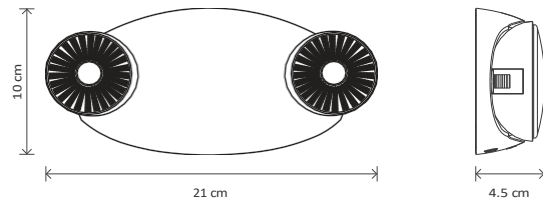

ORDERING GUIDE

1 Series

EML- B

Example code:

1 Series
 |
EML-B



Some codes of this luminaire are part of our immediate shipment program. Check the models here:
www.Jungo.Lighting/quickship