

STREET LIGHT LED

SIDEWALK LIGHT SERIES



TECHNICAL DATA

Input voltage	100 - 277 V~ (Multivoltage)
Input frequency	50 / 60 Hz
Dimmable	0 - 10 V
Color Temperature	CCT Selectable 3,000K 4,000K 5,000K
IRC	>70
Operating temperature	-30 to 50 °C
Harmonic distortion	<10%
Power factor	0.90
Opening angle	Type V
Mounting	Above ground
Rating	IP66 - IK10
Surge protection	2 kV
Light maintenance @100,000 hours	0.86 *Projected L70 (12K) ≥ 72,000 hours according to IES TM-21
Body	AL6063-T5 aluminum alloy
Optics	Polycarbonate
Color	Black

JUNGO LIGHTING

Sidewalk Light Series is constructed of high-strength IP66-rated aluminum, offering up to 80% energy savings compared to traditional technologies. Ideal for traditional park lighting, squares, public areas, gardens, parking lots, among other applications. Its design allows it to easily adapt to projects with different architectural styles, contemporary or traditional.

CERTIFICATES



NOM-003-SCFI-2014
NOM-031-ENER-2012

Model	Selectable Power	CCT Selectable	Luminous Efficiency	Luminous flux
SO	22 W 16.5 W 11 W 6.5 W	3,000K 4,000K 5,000K	105 lm/W	Max. 2,310 lumens
MO	22 W 16.5 W 11 W 6.5 W	3,000K 4,000K 5,000K	105 lm/W	Max. 2,310 lumens


KEY FEATURES



Jungo Connect is a complete and highly scalable central management system for lighting and IoT devices with multi-protocol support (Zigbee, BluetoothMesh, Wi-Fi, NB- IoT, 4G LTE) compatibility that meets all the devices and energy management needs of a smart industrial or commercial building.




Adjustable color temperature and power

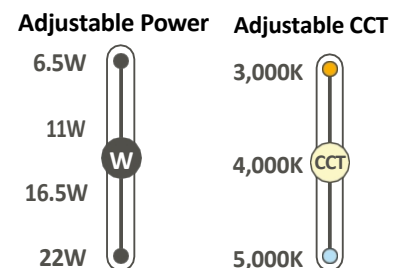




DIMENSIONS

SO
4.5 kg




MO
6.83 kg



PHOTOMETRIC DISTRIBUTION

Type V




ADDITIONAL ACCESSORIES



Terminal box for wiring

Code: CK-B01



Side blocker

Code: BC-B01

ORDERING GUIDE

1 Series 2 Model

SW **SO** 22W | 16.5W | 11W | 6.5W
MO 22W | 16.5W | 11W | 6.5W

Code example:

