



URBAN LIGHT AREA LIGHT SERIES

Designed for urban environments, provides high-quality illumination with multiple power options across two selectable models. It supports IoT integration for real-time monitoring and features energy-saving sensors that extend the fixture's lifespan.

Engineered for reliability and low maintenance, it is perfect for streets, parks, and public spaces seeking smart, sustainable lighting solutions.

Technical Data	
Input voltage	100 - 277V ~ / 200-480V ~
Input frequency	50 / 60 Hz
Dimmable	0 - 10 V (Dimmable)
Color temperature	CCT Adjustable 3000K 4000K 5000K
CRI	> 80
Operating temperature	-30 to 50° C
Harmonic distortion	<20 %
Power factor	0.90
Beam angle	Adjustable Beam Angle T3 T4 T5
Mounting	Surface Mounted: Round/Square Pole Bracket, Wall Bracket, Standard Bracket, Adjustable Pole Arm
Classification	IP66
Impact resistance	IK09
Anti-surge rating	10 kV
Light maintenance @100,000 hrs	0.86 <small>*Projected L70 (I2K) ≥ 72,000 hrs per IES TM-21</small>
Body	6063 aluminum alloy die cast
Optics	Polycarbonate
Color	Bronze

Model	Power Adjustable	CCT Adjustable	Beam Angle Adjustable	Luminous Efficiency	Luminous Flux
SO	60 W 80 W 100 W	3,000 K 4,000 K 5,000 K	T3 T4 T5	150 lm/W	Max. 15,000 lumens
MO	120 W 150 W 200 W	3,000 K 4,000 K 5,000 K	T3 T4 T5	150 lm/W	Max. 30,000 lumens
HO	240 W 300 W 400 W	3,000 K 4,000 K 5,000 K	T3 T4 T5	150 lm/W	Max. 60,000 lumens

Compatible with smart photocell controls



Easy-access maintenance door



Adjustable Power, CCT & Beam Angle



Compatible with 2 1/2-inch tubes (64 mm diameter)

Control Systems



0-10V



Additional Accesories



Round/square Pole bracket
Code:
AL-ACC-01



Adjustable pole arm
Code:
AL-ACC-02



Wall bracket*
Code:
AL-ACC-03





Bracket*
Code:
AL-ACC-04





Photocell
Code:
AL-ACC-05

Dimensions



SO




MO




HO

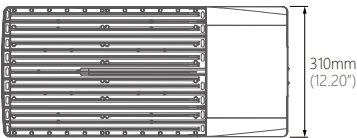


Photometric distribution



T3



T4



T5

To download the IES file go to:
Jungo.Lighting/recursos

Ordering Guide

1 Series

AL

2 Model

SO – 60 W | 80 W | 100 W
MO – 120 W | 150 W | 200 W
HO – 240 W | 300 W | 400 W

3 Mounting

1 Round/Square Pole Bracket,
2 Adjustable Pole Arm
3 Wall Bracket
4 Standard Bracket

4 Control

N Shorting Cap
P Photocell
I Smart Cities®

Example Code:

1 Series

AL

3 Mounting

4

2 Model

SO

4 Control

P