

EMERGENCY LIGHT

DUAL HEAD SERIES



Locate exit routes during power outages with emergency lighting for **up to 100 minutes**. This LED fixture features two adjustable heads, a Nickel-Cadmium battery that recharges in just 24 hours, a self-diagnostic button, and an LED indicator to confirm the battery's charge status.

CERTIFICATIONS




Technical Data	
Input voltage	100 - 277V V ~ (Multivoltaje)
Input frequency	50 / 60 Hz
Dimmable	0-10 V
Color temperature	6000K
Operating temperature	0 a 40°C
Harmonic distortion	<20%
Power factor	0.8
Beam angle	120°
Battery	Nickel-Cadmium, maintenance-free 3.6 V, 600 mAh
Charging time	24 hours
Operating time	100 minutes
Mounting	Surface-mounted (included)
Clasification	IP20
Body	ABS (Acrylonitrile Butadiene Styrene)
Optics	Polycarbonate

Model	Power	Luminous Efficiency	Luminous Flux
EML-B	6 W	33 lm/W	200 lumens

Dimensions

EML-B
0.3 kg

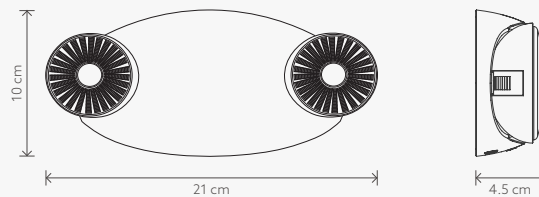

Photometric Distribution



To download the IES file, visit:
Jungo.Lighting/descargables

