



Emergency Light

DUAL HEAD WITH SIGN SERIES

Easily locate exit routes during power outages. This fire-resistant ABS plastic fixture provides **up to 100 minutes** of lighting, a Nickel-Cadmium battery that recharges in just 24 hours, a self-diagnostic button, and an LED indicator to confirm the battery's charge status. It features dual EXIT signage that remains continuously illuminated and two LED heads to direct light where needed.

CERTIFICATIONS



Technical Data	
Input voltage	100 - 277 V - (Multivoltage)
Input frequency	50 / 60 Hz
Dimmable	0 - 10 V
Color temperature	5000K
CRI	> 75
Operating temperature	-30 to 50 °C
Harmonic distortion	<10 %
Power factor	0.95
Beam angle	120°
Mounting	Surface-mounted: wall base (included)
Classification	IP65
Impact resistance	IK08
Anti-surge rating	2 kV
Light maintenance @100,000 hrs	0.86 <small>*Projected L70 (12K) ≥ 72,000 hours per IES TM-21</small>
Body	Die-cast A383 aluminum alloy
Optics	Polycarbonate
Color	Yellow

Model	Power	Luminous Efficiency	Luminous Flux
EML-A	4 W	75 lm/W	300 lumens





Control Systems





Dimensiones

Distribución Fotométrica

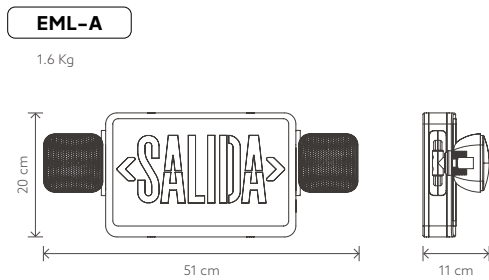

Guia para ordenar

Ejemplo de Código:

1 Serie
EML-A

1 Serie
|
EML-A