



URBAN & SOLAR

SIDEWALK LIGHT SERIES

The Sidewalk Light Series is constructed from high-strength aluminum with an IP66 rating and offers up to **80% energy savings** compared to traditional technologies. Ideal for traditional lighting in parks, plazas, public areas, gardens, parking lots, and other applications. Its design allows for easy adaptation to projects with contemporary or traditional architectural styles.



CERTIFICATIONS



NOM-003-SCFI-2014
NOM-031-ENER-2012

Technical Data	
Input voltage	100 - 277V V ~ (Multivoltage)
Input frequency	50 / 60 Hz
Dimmable	0 - 10 V
Color temperature	Selectable CCT 3000K 4000K 5000K
CRI	> 70
Operating temperature	-30 to 50° C
Harmonic distortion	<10 %
Power factor	0.90
Beam angle	Type V
Mounting	Surface mounted
Clasification	IP66 - IK10
Anti-surge rating	2 kV
Light maintenance @100,000 hrs	0.86 *Projected L70 (I2K) ≥72,000 hrs per IES TM-21
Body	AL6063-T5 aluminum alloy
Optics	Polycarbonate
Color	Black

Model	Selectable Power	Selectable CCT	Luminous Efficiency	Luminous Flux
SO	6.5W 11W 16.5W 22W	3,000K 4,000K 5,000K	105 lm/W	Max. 2,310 lumens
MO	6.5W 11W 16.5W 22W	3,000K 4,000K 5,000K	105 lm/W	Max. 2,310 lumens

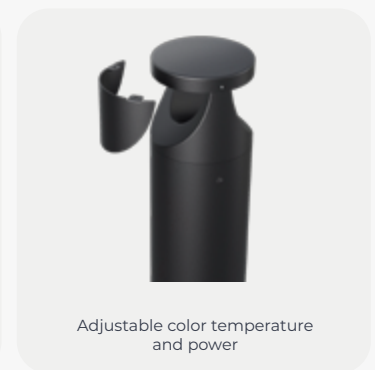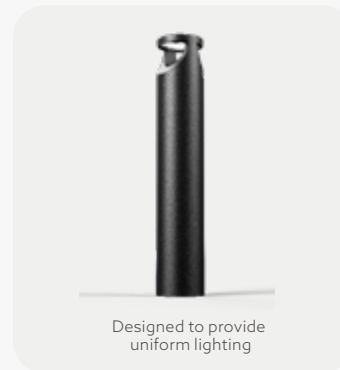


Control Systems






DIMENSIONS

SO
4.5 kg




MO
6.83 kg



PHOTOMETRIC DISTRIBUTION

Type V



ADDITIONAL ACCESSORIES



Terminal box for
wiring
Code: **CK-B01**



Side blocker
Code: **BC-B01**

ORDERING GUIDE

1 Series **2 Model**
SW SO 22W | 16.5W | 11W | 6.5W
MO 22W | 16.5W | 11W | 6.5W

Code example:

1 Series
|
SW
|
2 Model

MO