



HIGH & LOW BAY
VENUS V4
SERIES

Available in three selectable wattages and a 120° beam angle, this lightweight **LED fixture** stands out as a leader in the **High Bay Light** category, following **Jungo Lighting's** high-quality standards. Its body, made from die-cast A383 aluminum alloy, and its outstanding 100,000-hour lumen maintenance make this fixture a reliable choice. Ideal for factories, warehouses, hangars, storage facilities, industrial buildings, gyms, workshops, exhibition halls, department stores, and many more.

CERTIFICATIONS



Technical Data	
Input voltage	100 - 277V ~
Input frequency	50 / 60 Hz
Dimmable	0 - 10 V
Color temperature	5000K
CRI	> 80
Operating temperature	-20 a 50° C
Harmonic distortion	<15 %
Power factor	0.93
Beam angle	120 °
Mounting	Suspended: Ring (included) / Surface mounted: Rotatable bracket and double bracket
Classification	IP65
Impact resistance	IK08
Anti-surge rating	2.5 kV
Light maintenance @100,000 hrs	0.86 *Projected L70 (I2K) ≥72,000 hrs per IES TM-21
Body	Polycarbonate
Optics	Polycarbonate
Color	White

Model	Power adjustable	Luminous Efficiency	Luminous Flux
FLEX	100W 150 W 200 W	180 lm/W	Max. 36,000 lumens

Emergency battery:
Provides power for a minimum
of 90 minutes; full recharge
within 24 hours



Motion and daylight sensor



Selector switch allows
choosing between 3 wattage
levels

Control Systems




0-10V




DIMENSIONS

FLEX

2.2 kg

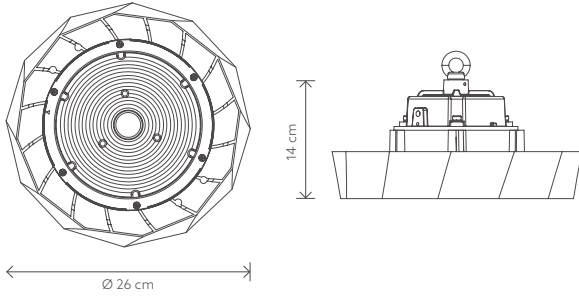

PHOTOMETRIC DISTRIBUTION



120°

ADDITIONAL ACCESORIES



Quick connector IP68

Code: QCONNECTOR

(85-260 V~/25 A / 3 wires)



Emergency Battery

Code:

EMUFO-25170-TT (25 W)

EMUFO-40170-TT (40 W)



**Remote control
for emergency
battery**

Code: RCEMA



Aluminum reflector

Code:

VN3AL60 (60°)

VN3AL90 (90°)

VN3AL120 (120°)



Polycarbonate reflector

Code:

VN3PC70 (70°)

VN3PC90 (90°)

VN3PC120 (120°)



Double bracket

Code: VN3BRDOB



Rotable bracket

Code: VN3BR



Extra 1m cable

Code: 1MCABLE



NEMA type twist-lock connector

Code:

TWLOCKL5-15P (125 V~/15 A / 3 wires)

TWLOCKL6-15P (250 V~/15 A / 3 wires)

TWLOCKL7-15P (277 V~/15 A / 3 wires)

ORDERING GUIDE

1 Series 2 Control

VN4

N None

I Jungo Connect: Integrated motion and light sensor

Code example:

1 Series
|
VN4 |
|
2 Control