

LOW BAY · VAPOR TIGHT · WET LOCATIONS

Nova Wide®.

4FT Series · 45 to 75 W · IP66

Vapor tight LED fixture for warehouses, distribution centers, manufacturing, loading docks, cold storage and covered parking.

Field-selectable wattage and CCT, opal diffuser with 120° beam angle and stainless steel clips. Multivolt 100–277 VAC, 0–10 V dimming, –40 to 113 °F.

3 POWER SWITCH
WATTAGE

3 CCT SWITCH
CCT

WET LOCATION RATED
IP66

150 lm/W
luminous efficacy at all 3 wattages


11,250 lm
maximum lumen output (75 W)

3 + 3
field-selectable wattages and CCTs

IP66
and IK08: water, dust and impact

Sealed for demanding environments.

Polycarbonate body and diffuser, stainless steel clips and built-in switch: resists moisture, dust, impact and cold.

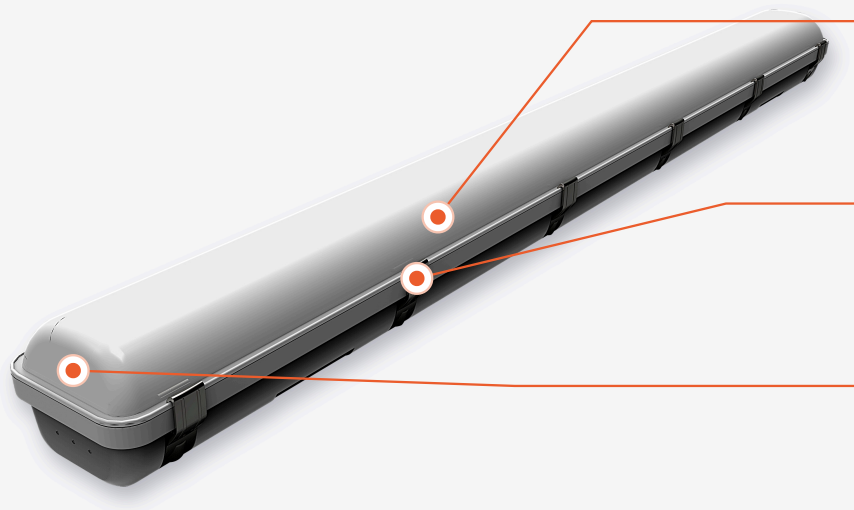

01 Opal polycarbonate diffuser
Soft, uniform light at a 120° beam angle, with no direct glare.

02 Stainless steel clips
Hold the diffuser and body together to keep the IP66 seal.

03 Polycarbonate body
Lightweight (5.47 lb), rust-proof and impact resistant (IK08).



Ready for wet locations

Sealed against water jets and dust, and impact resistant. For indoor and covered outdoor use.



Field-adjustable

Select 45, 65 or 75 W and 3500, 4000 or 5000 K on the fixture to match mounting height and task.



Up to 11,250 lumens

150 lm/W at all three wattages: fewer watts for every square foot lit.



Optional emergency battery

Versions with an 8 W or 15 W battery keep the light on during a power outage.

02 — CONFIGURATION

3 wattages and 3 CCTs in one fixture.

Set wattage and color temperature with the switch to match mounting height and task, without changing fixtures.

4FT

47.3 IN
1,201 MM

45 W		6,750 lm
65 W		9,750 lm
75 W		11,250 lm

MAX LUMENS **11,250 lm**

Options

	SELECTED WHEN ORDERING
MMS	**Microwave sensor** · turns on when motion is detected
EMB8	8 W emergency battery
EMB15	15 W emergency battery

SELECTABLE CCT

One color temperature for every task.


- **3500 K** Warm white
- **4000 K** Neutral white
- **5000 K** Daylight

03 — APPLICATIONS


From the warehouse to the parking lot.


Warehouses & distribution centers


Manufacturing & assembly

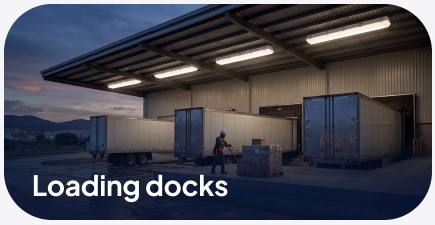
Loading docks


Cold storage

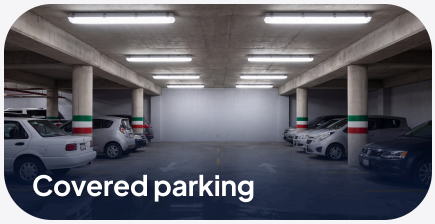
Covered parking

MOUNTING



- **Surface mount** (included)
- **Chain or cable** (accessory)
- **Bracket** (optional)

CONTROL SYSTEM



- **0–10 V** Dimming
- **Switch** Wattage & CCT
- **Sensor** (optional)

ADDITIONAL ACCESSORIES


Emergency battery



Chain kit


Clips (included)

Nova Wide®.

Vapor tight LED Low Bay · 4FT Series · 45 to 75 W

JUNGO LIGHTING



IP66 · 0-10 V

GENERAL INFORMATION

Input voltage	100–277 VAC	Rating	IP66 · IK08
Input frequency	50/60 Hz	Location	Wet location
Dimmable	0–10 V	Body	Polycarbonate
CRI	> 80	Diffuser	Opal PC · 120°
THD	< 20 %	Clips	Stainless steel
Power factor	≥ 0.90	Finish	Gray
Surge protection	2 kV	Mounting	Clips, chain or bracket
Operating temp.	-40 to 113 °F	Weight	5.47 lb (2.48 kg)

TECHNICAL SPECIFICATIONS

MODEL	SELECTABLE WATTAGE	SELECTABLE CCT	BEAM ANGLE	EFFICACY	LUMEN OUTPUT
4FT	45 | 65 | 75 W	3500 | 4000 | 5000 K	120°	150 lm/W	6,750 | 9,750 | 11,250 lm

DIMENSIONS



MODEL	L	W	H	WEIGHT
4FT	47.3 in 1,201 mm	4.9 in 125 mm	3.7 in 93 mm	5.47 lb 2.48 kg

ORDERING GUIDE

1 · MODEL	2 · WATTAGE	3 · CCT	4 · SENSOR	5 · BATTERY
NWP4 · 4FT	75W · 45/65/75 W	MCT · 3500/4000/5000 K	— · No sensor	— · None
			MMS · Microwave	EMB8 · 8 W
				EMB15 · 15 W

ORDERING EXAMPLE

NWP4 (MODEL) - 75W (WATTAGE) - MCT (CCT) - EMB15 (BATTERY)

4FT, 45 to 75 W, selectable CCT and 15 W battery, no sensor. Wattage and CCT are set on the fixture.

jungo.lighting/en/nova-wide
Message us +52 81 1502 6590
hello@jungo.lighting

5 YEAR WARRANTY

Jungo Lighting® is a brand of Jungo Industries, S.A.P.I. de C.V. · Flux calculated at 150 lm/W · Specifications subject to change.