

WALL MOUNTED • OUTDOOR • WET LOCATIONS

Wall Pack Edge.

10 in • 14 in Series • 15 to 120 W

Full-cutoff LED wall pack for facades, entrances, walkways and perimeter walls. A 3-in-1 switch sets wattage, CCT and photocell in the field.

Up to 176 lm/W and 20,400 lm, IP65 and 0–10 V dimming. Compatible with Jungo Connect One for occupancy and daylight automation. 100–277 V~.



WATTAGE



CCT



PHOTOCELL



OUTDOOR

176 lm/W

maximum efficacy (14 in • 60 W • 4000 K)

20,400 lm

maximum flux (14 in • 120 W • 4000 K)

IP65

rain and dust rated, –40 to 122 °F

3 in 1

field switch: wattage, CCT and photocell

Compact, sealed and field-adjustable.

Die-cast aluminum with cooling fins, Type III full-cutoff optic and a 3-in-1 switch for wattage, CCT and photocell.



- 01 Wall mounting**
Junction box or direct to wall; five ½ in knockouts.
- 02 Die-cast aluminum**
Fins dissipate LED heat.
- 03 Type III optic · full cutoff**
Polycarbonate lens: lights wall and ground without glare.
- 04 Built-in mini photocell**
On at dusk, off at dawn.

IP65



Built for the outdoors

Sealed against dust and rain for exterior walls. Operates from -40 to 122 °F.


3-IN-1 SWITCH



One package, any project

Four wattages per package, 3000, 4000 or 5000 K CCT and photocell on/off are set in the field. Factory default: maximum wattage, 5000 K and photocell off.

176 LM/W

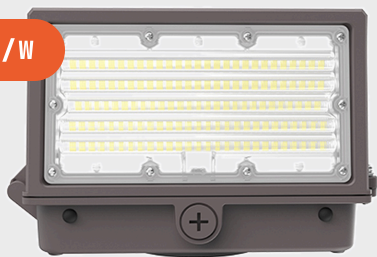

More light, less energy

Up to 176 lm/W and 20,400 lm, with 0-10 V dimming and L70 rated life of 50,000 h.

MINI PHOTOCELL



Turns itself on

On at dusk and off at dawn, with no timer or external sensor. Enabled or disabled with the switch.

2 sizes, 5 packages and 3 CCTs.

Size, package, battery and finish are chosen when ordering; wattage, CCT and photocell are set in the field with the 3-in-1 switch.

10 in

FLUX PER PACKAGE • 4000 K

40 W  6,580 lm

Switch: 15 • 20 • 30 • 40 W

80 W  13,120 lm

Switch: 40 • 50 • 60 • 80 W

MAXIMUM FLUX **13,120 lm**

14 in

FLUX PER PACKAGE • 4000 K

60 W  10,170 lm

Switch: 30 • 40 • 50 • 60 W

80 W  13,336 lm

Switch: 40 • 50 • 60 • 80 W

120 W  20,400 lm

Switch: 60 • 90 • 100 • 120 W

MAXIMUM FLUX **20,400 lm**

Efficacy

LM/W • FULL WATTAGE

	K	3000	4000	5000
10 in • 40 W		154.5	164.5	161.9
10 in • 80 W		154.0	164.0	161.4
14 in • 60 W		159.2	169.5	166.8
14 in • 80 W		156.5	166.7	164.0
14 in • 120 W		159.6	170.0	167.3

MAX. 60 W • 4000 K **176 lm/W**

SELECTABLE CCT

A color temperature for every facade.

3000 K

Warm




4000 K

Neutral

5000 K

Daylight

From the entrance to the perimeter wall.

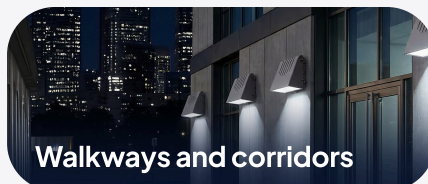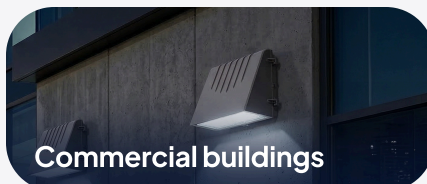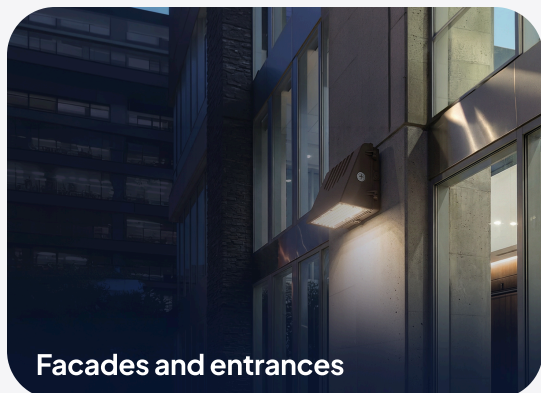

MOUNTING



Wall

Junction box or direct to wall • five ½ in knockouts

CONTROL SYSTEM



0-10 V dimming
(line voltage)



Mini photocell
(built-in)



3-pin receptacle
for Jungo Connect One

EMERGENCY BACKUP

4 W **YM04S** 10 in • 40 W

8 W **YM08S** 10 in • 80 W and 14 in

15 W **YM15S** 14 in

Optional, factory installed; chosen in the code. With battery it operates from 32 to 113 °F.

Wall PackEdge.

Full-cutoff LED wall pack · 10 in and 14 in · 15 to 120 W



IP65


GENERAL INFORMATION

Input voltage	100–277 V~	Rating	IP65
Frequency	50/60 Hz	Temperature	–40 to 122 °F
Wattage	15 to 120 W	CCT	3000 / 4000 / 5000 K
Maximum flux	20,400 lm	Optic	Polycarbonate · Type III
Max. efficacy	176 lm/W	Housing	Die-cast aluminum
CRI	> 80	Finish	Bronze or black
THD	< 20 %	Rated life	L70 · 50,000 h
Power factor	≥ 0.90	Photocell	Built-in mini
Dimming	0–10 V	Battery (optional)	4 / 8 / 15 W · 32 to 113 °F
Surge protection	6 kV	Smart control	3-pin receptacle · Jungo Connect One

TECHNICAL SPECIFICATIONS

MODEL	PACKAGE	WATTAGE (SWITCH)	FLUX · 4000 K	CCT	OPTIC
10 in	40 W	15/20/30/40 W	2,472/3,348/5,028/6,580 lm	3000/4000/5000 K	Type III
10 in	80 W	40/50/60/80 W	6,796/8,435/10,056/13,120 lm	3000/4000/5000 K	Type III
14 in	60 W	30/40/50/60 W	5,037/6,824/8,530/10,170 lm	3000/4000/5000 K	Type III
14 in	80 W	40/50/60/80 W	6,840/8,535/10,236/13,336 lm	3000/4000/5000 K	Type III
14 in	120 W	60/90/100/120 W	10,560/15,552/17,160/20,400 lm	3000/4000/5000 K	Type III

DIMENSIONS

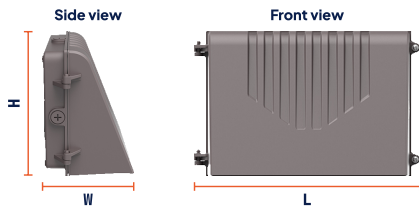

MODEL	L	W	H	WEIGHT
10 in	10.05 in 255 mm	6.26 in 159 mm	8.86 in 225 mm	3.7 lb 1.7 kg
14 in	14.48 in 368 mm	6.44 in 164 mm	9.25 in 235 mm	6.0 lb 2.7 kg

ORDERING GUIDE

1 · SERIES	2 · SIZE	3 · PACKAGE	4 · BATTERY (OPT.)	5 · FINISH
WPE	10 10 in	40W 10 in · 80W 10 & 14 in	No code · YM04S 4 W	BRZ Bronze
	14 14 in	60W 14 in · 120W 14 in	YM08S 8 W · YM15S 15 W	BLK Black

ORDERING
EXAMPLE

WPE
SERIES

14
SIZE

80W
PACKAGE

YM15S
BATTERY

BRZ
FINISH

14 in, 80 W package (40–80 W by switch), 15 W battery and bronze finish.



jungo.lighting/en/wall-pack-edge
 Message us +52 81 1502 6590
 hello@jungo.lighting



Jungo Lighting® is a brand of Jungo Industries, S.A.P.I. de C.V. · Flux and efficacy per IES LM-63 files (60 combinations; maximum flux at 14 in · 120 W · 4000 K). Specifications subject to change.